

# colorSENSOR ACS Accessories

■ 케이블 및 기타 액세서리

colorCONTROL ACS 액세서리	
제품명	적용 제품
White standard 30 mm Zenith	colorSENSOR 및 colorCONTROL
White standard 30 mm Zenith	
White standard 5 x 5 cm Zenith	
White standard 5 x 5cm Zenith calibrated	
CAB-M9-4P-St-ge; 2 m-PUR;open	colorCONTROL ACS7000 (전원)
CAB-M9-4P-St-ge; 5 m-PUR;open	
CAB-M9-8P-St-ge; 2 m-PUR;open	colorCONTROL ACS7000 (디지털 I/O, 동기화)
CAB-M9-8P-St-ge; 5 m-PUR;open	
CAB-M9-7P-St-ge; 2 m-PUR;open	colorCONTROL ACS7000 (Color Out)
CAB-M9-7P-St-ge; 5 m-PUR;open	
CAB-RJ45-Eth; 2 m-PVC-Cat5e; RJ45-Eth	colorCONTROL ACS7000 (Ethernet / -CAT)
CAB-RJ45-Eth; 5 m-PVC-Cat5e; RJ45-Eth	
CAB-RJ45-Eth-Cross; 3 m-PVC-Cat5e; RJ45-Eth	
CAB-RJ45-Eth-Cross; 5 m-PVC-Cat5e; RJ45-Eth	
CAB-M9-5P-co-straight; 2 m-PVC-RS422; open ends	colorCONTROL ACS7000 (RS422)
CAB-M9-5P-co-straight; 5 m-PVC-RS422; open ends	
CAB-M9-5P-co-straight; 2 m-PVC-RS422; Sub-D-15P-co-straight	colorCONTROL ACS7000 (IF2008)
CAB-M9-5P-co-straight; 5 m-PVC-RS422; Sub-D-15P-co-straight	
IF2008 Interface card RS422 / PCI-card	colorCONTROL ACS7000 (RS422 / PC)
IF2001 / USB 1-channel RS422 / USB converter	colorCONTROL ACS7000
FCS-ACS1-30 / 0 adapter tactile	FCS-X-ACS1-30/0-50-XXXX
FCS-ACS adapter TT-TR	모든 ACS 센서 헤드 (수신 화이버 연결 조명)
FCS-ACS3 90° Aufsatz	FCS-X-ACS3 TT 및 TR
FCS-ACS3-200 mounting rail	FCS-X-ACS3
FCS-ACS3 mounting adapter 50 mm	FCS-ACS3-200 마운팅 레일
FCS-ACS3 mounting adapter 150 mm	
FCS-ACS1 / ILD1420 adapter plate angled	ILD1420를 사용한 FCS-X-ACS1 거리 재조정
FCS-ACS2 / ILD1420 adapter plate angled	ILD1420를 사용한 FCS-X-ACS2 거리 재조정
FCS-ACS2 / ILD1420 adapter plate angled	
전원 PS2030 24 V / 24 W / 1A; 2 m-PVC; terminal-2P-co-fm-straight	CAB-M9-4P-co-straight; Xm-PUR; open ends (전원)

레이저변위센서

장거리레이저변위센서

2D · 3D 스캐너

마이크로미터

공초점변위센서

분광간섭변위센서

정전용량변위센서

와전류변위센서

마그네틱변위센서

와이어변위센서

접촉식변위센서

데이터처리

온도센서


열화상카메라

컬러센서

진동센서


# colorSENSOR ACS Accessories

■ 핀 배열

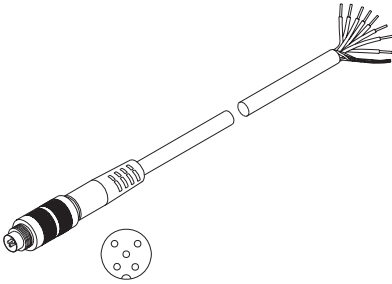


CAB-M9-5P-co-straight;  
Xm-PVC-RS422; open ends  
RS422 연결 케이블  
(최대 길이 5 m, 외장 PVC)

핀	색상	ACS7000	15 핀 IF2008	10 핀 IF2001
1	백색	TX	3	
2	갈색	/TX	4	
3	녹색	/RX	2	
4	노란색	RX	1	
5	회색	GND RS422 DC-isolated	15	9

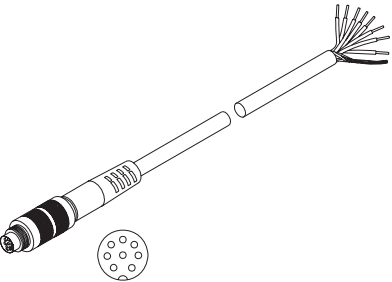


CAB-M9-8P-co-straight;  
Xm-PUR; open ends  
전원 / PLC 또는 디지털 I/O 연결 케이블  
(최대 길이 10 m, 외장 PUR)

핀	색상	ACS7000
1	백색	Error
2	갈색	GND Error
3	녹색	Sync. OUT
4	노란색	GND Sync. OUT
5	회색	Sync. IN
6	분홍색	GND Sync. IN
7	청색	LLL / HLL
8	적색	

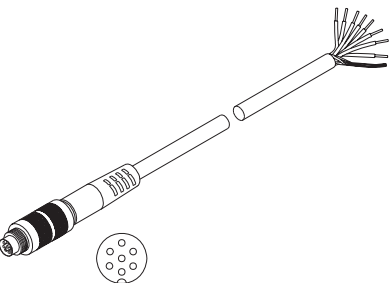

CAB-M9-7P-co-straight;  
Xm-PUR; open ends  
연결 케이블 색상 OUT  
(최대 길이 10 m, 외장 PUR)

핀	색상	ACS7000
1	백색	OUT 0
2	갈색	OUT 1
3	녹색	OUT 2
4	노란색	OUT 3
5	회색	GND
6	분홍색	n.c.
7	청색	

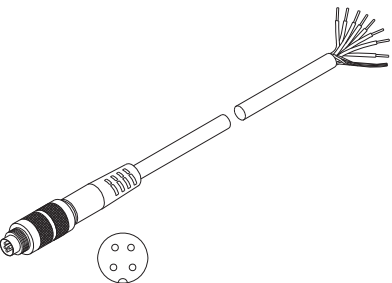

CAB-M9-4P-co-straight;  
Xm-PUR; open ends  
전원 연결 케이블  
(최대 길이 10 m, 외장 PUR)

핀	색상	ACS7000
1	백색	n.c.
2	갈색	+24 VDC (± 15%)
3	흑색	n.c.
4	청색	GND (0 V)

컬러센서

- colorSENSOR CFO100
- colorSENSOR CFO200
- colorSENSOR KL-xx / xx
- CFS2-Mxx Circular sensor
- colorSENSOR OT-3-LD
- colorCONTROL MFA
- colorSENSOR/CONTROL Accessories
- colorCONTROL ACS7000
- colorCONTROL ACS1
- colorCONTROL ACS2
- colorCONTROL ACS3
- colorCONTROL ACS Software
- colorCONTROL ACS Accessories

FT